


FP-5700

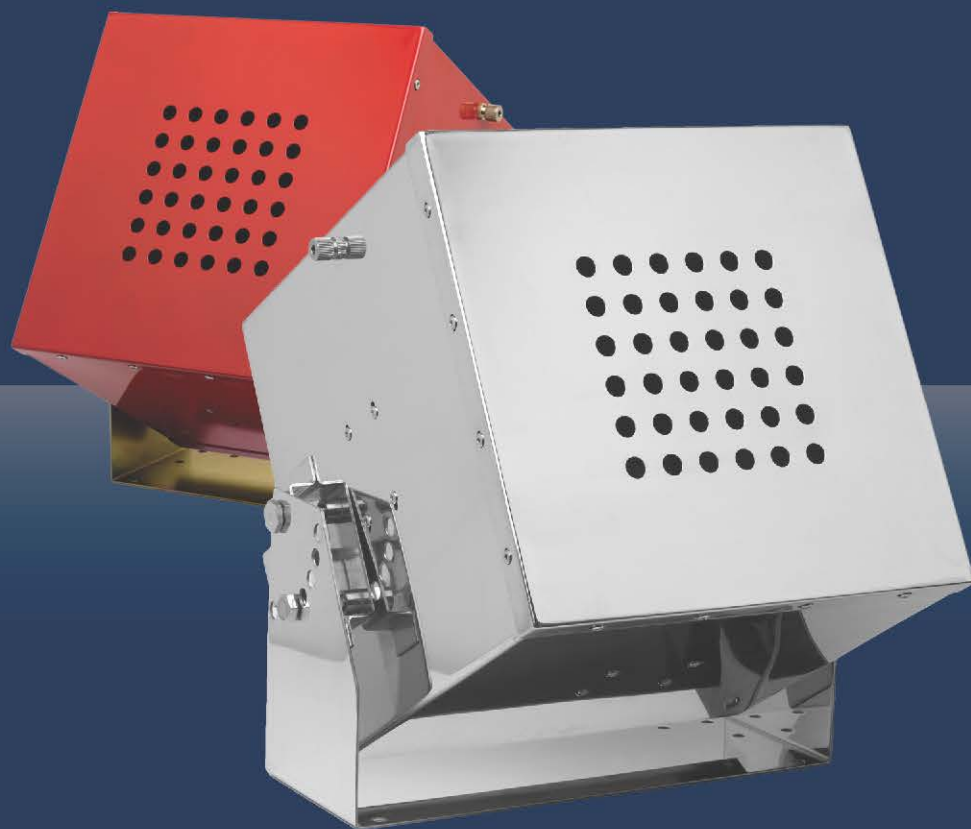

■ FP-5700

Product Code: 10151

Product Description: FirePro Fire Extinguishing Generator FP-5700.

Features:

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

■ FP-5700S

Product Code: 10394

Product Description: FirePro Fire Extinguishing Generator FP-5700S.

Features:

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

■ FP-5700T

Product Code: 10319

Product Description: FirePro Fire Extinguishing Generator FP-5700T.

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-5700TS

Product Code: 10625

Product Description: FirePro Fire Extinguishing Generator FP-5700TS.

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Stainless steel casing.

TECHNICAL INFORMATION

Model	FP-5700 / FP-5700S / FP-5700T / FP-5700TS
Activation mechanism	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	26400 g (excluding bracket)
Mass of FPC compound	5700 g
Operational discharge time	15 - 20 seconds
Discharge length	8 m
Dimensions	300 mm x 300 mm x 300 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets